


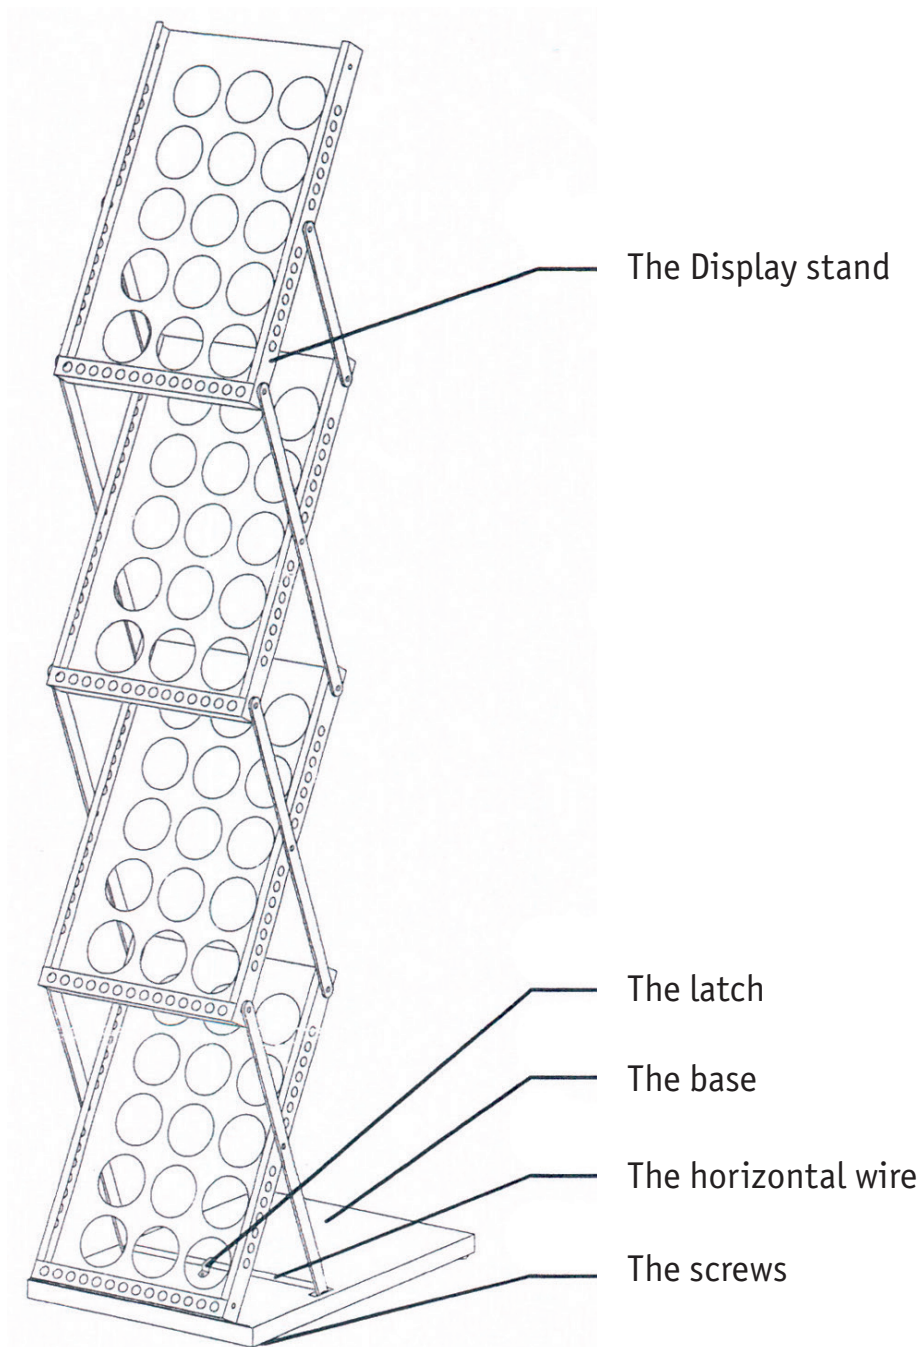

1. Pull open the display stand. Open until the legs fit into the cut out holes on the base. Fasten the latch across the horizontal wire to lock in position.

2. To make the display stand steady, adjust the screw legs on the base.